**Bluetooth** 

BRT34A USER'S MANUAL

34" AMPLIFIED SOUND BAR | BLUETOOTH® FEATURES BUILT-IN CLASS D AMPLIFIER AND BUILT-IN DOME LIGHT





**BOSS Audio Systems** 3451 Lunar Court • Oxnard, CA 93030 www.bossaudio.com 800-999-1236 US Toll-free **805-751-4853 Customer Service** Tech Support: www.bossaudio.com/support



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BOSS Audio Systems is under license. Other trademarks and trade names are those of their respective owners

Thank you for purchasing this

**BRT34A Soundbar Sound System** Please read through these instructions carefully so you will know how to operate your model properly. After you have finished reading the instructions, keep this document in a safe place for future reference.

THIS PACKAGE CONTAINS 1 - BRT34A Soundbar Speaker System I - Bluetooth Multi-Function Controller Kit 1 - 1.75" / 2.00" Rollbar Mounting Kit

1 - User Manual Quick Start Guide / Poster

1 - Warranty Card / Facebook Card

1 - Quick Connect Power Cable

#### INFORMATION TO THE USER

## Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. Other trademarks and trade names are those of their respective owners.

**BLUETOOTH OPERATION** (B) (C) NR (A200 K) NR (A) 6

## PAIRING & DISCOVERING A NEW BLUETOOTH CONNECTION

1) Power on the BRT34A by short-pressing the 6 Power button, long-press the 4

Bluetooth button for 3 seconds, the BLUE LED will start to rapidly flash, signaling that the UNIT is now ready for Bluetooth pairing

NOTE: You have 2 minutes before you must restart this procedure over again.

The BRT34A is now in pairing mode:

c. TURN ON Bluetooth

## ANDROID users:

- a. Go into the Settings Menu of your device
- b. Enter the Bluetooth Menu c. TURN ON Bluetooth and press SCAN
- d. "Boss audio BRT34A" will now be displayed under AVAILABLE DEVICES e. If prompted, enter passcode: "0000"
- iOS users:
  - a. Go into the Settings Menu of your iOS device b. Enter the Bluetooth Menu
- d. "Boss audio BRT34A" will now be displayed e. If prompted, enter passcode: "0000"

If Boss audio BRT34A is not seen, repeat the above steps to refresh the "Device List"

4) When the connection is successful a tone will be heard, and the *Bluetooth* LED indicator will light solid, you are now ready to stream music from your favorite media player to the UNIT

# BEFORE YOU START INSTALLATION



To avoid potential shorts in the electrical system, be sure to disconnect the (-) battery cable before installation. Use this unit with a 12-Volt battery and negative grounding only. Failure to do so may result in a fire or malfunction.



When replacing the fuse, be sure to only use a fuse of the rating specified on this product. To avoid short-circuiting, cover any disconnected leads with insulating tape. It is especially important to insulate any unused wires, which if left uncovered may cause a short circuit. When connecting other devices to this product, refer to the manual for the product to be connected. The black cable is ground, make sure to connect the ground wire first. Ensure that the ground wire is properly connected to metal parts of the vehicles body frame or direct to the battery if your vehicle does not have a grounded chassis frame. The ground wire of this units power amp and a second powered system must be connected to the frame separately with different screws. If the screw for the ground wire loosens or falls out, it could result in fire or malfunction.

## **GETTING STARTED**

(8) (4) N N 2403 N N N

1) Press the 3 RGB ILLUMINATION ON/OFF - Once to Turn ON RGB Mode, again to Turn OFF RGB Mode or press the POWER Button on the RGB CONTROLLER to POWER ON/OFF RGB Mode

2) The RGB ILLMINATION ON/OFF is synchronized with the BRT34A RGB RF CONTROLLER 3) Auto 10 minute timer when BRT34A ACC is turned OFF; RGB ILLUMINATION ON/OFF and BRT34A RGB RF CONTROLLER can be turned on respectively.

NOTE!! To conserver battery life, the RGB ILLUMINATION will automatically turn off after 10 minutes when BRT34A ACC is turned OFF

## 

INFORMATION TO THE USER

# FCC COMPLIANCE STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause

undesired operation of this device.


This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter. The Bluetooth antenna cannot be removed (or replaced) by user. This equipment complies with FCC/ IC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that is deemed to comply without maximum permissive exposure (MPE) evaluation. But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles). Alteration or modifications carried out without appropriate authorization may invalidate the user's right to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no quarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Relocate or reorient the receiving antenna.

□ Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. ☐ Consult the dealer or an experienced radio/TV technician for help.

CAUTION!! ADJUSTMENT OR ALTERATIONS OF THIS DEVICE MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

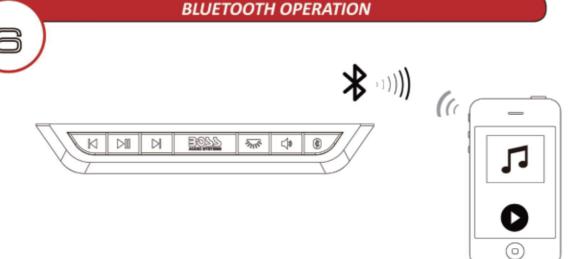

#### RECONNECTION

1) Power on the BRT34A and your last paired Bluetooth device.

2) Ensure you are within range of the UNIT, the unit will now automatically reconnect

3) If the device is out of range from the **UNIT**, it will disconnect automatically: a. The UNIT will reconnect automatically to your device when in range

4) If your device was previously paired with the UNIT

a. Ensure no other devices are currently paired

d. Choose the "Boss audio BRT34A" to reconnect


b. Enter the Bluetooth Menu on your device being paired C. "Boss audio BRT34A" will display under AVAILABLE DEVICES

5) To clear all previously paired devices from memory, press and hold the Bluetooth


NOTE: Some devices may require a manual Bluetooth reconnection once the Bluetooth devices are powered OFF / ON and/or back in range, repress the "Boss audio BRT34A" button in BLUETOOTH settings on your device

Using this product without running the engine can drain the battery. To avoid battery exhaustion, be sure to occasionally run the vehicles engine while using this product.

# **MOUNTING THE SOUNDBAR**

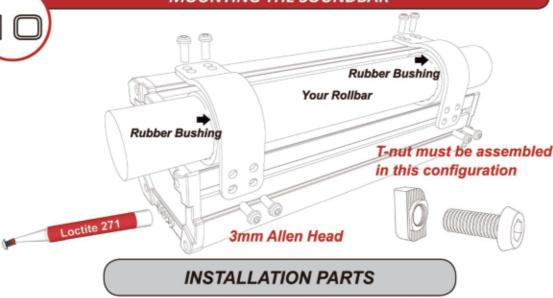

RUBBER BUSHINGS **BRACKETS** 

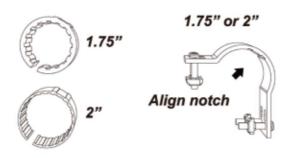

Some applications may require optional friction tape between rubber bushings for a secure, tight fit, this can be found at most local hardware stores

1) Determine the size of rollbar for your vehicle, install rubber bushings on rollbar 2) Insert and align notch of rubber bushings into the aluminum brackets 3) Apply supplied Loctite to allen bolt tips, then align the allen bolts and T-nuts into the T-channel, firmly tighten. Let dry for 20 minutes. Fully cures in 24 hours. 4) Recheck all allen bolts are tight, ensure T-nut's are properly seated in the T-channel correctly

CAUTION!! Mounting brackets should be periodically checked to be sure they are tight and secure before use of the vehicle.

#### BEFORE YOU START

#### **IMPORTANT SAFETY PRECAUTIONS**

■ Do not operate mobile equipment while driving a motorized vehicle – safe driving and safety consideration of others should always be your highest priority

■ In the event you should notice smoke, strange noises or odor from this product, or any other abnormal signs, immediately turn off the power and consult your dealer or the nearest authorized BOSS AUDIO SYSTEMS Service Center Using this product in this condition may result in permanent damage to the system ■ Set your volume control at a low setting, then slowly increase the sound until you can

hear it comfortably without distortion, or ear discomfort ■ BE SURE TO OBSERVE THE FOLLOWING GUIDELINES: - Do not turn up the volume so high that you can't hear what's around you

- Use caution or temporarily discontinue use in potentially hazardous situations

WARNING - Always consult a professional installer ■ Do not attempt to install or service this product by yourself. Installation or servicing of this product by persons without professional training and experience in electronic equipment and motorized vehicle accessories may be dangerous and could expose you to the risk of electric shock, injury or other hazards

INSTALLATION PRECAUTIONS

■ Refer any repairs to a qualified BOSS AUDIO SYSTEMS Service Center ■ The BRT34A should be hard wired directly to the main vehicle battery ■ When wiring directly to the vehicles battery, be sure to disconnect the battery's negative terminal wire before starting any wiring procedures

■ The ground cable length should be as short as possible (See wiring diagram) ■ The BRT34A has a weather resistant design, it should not be under any circumstances submerged in, or under water Use only the supplied installation parts provided with the BRT34A

■ Wash with a mild detergent and lukewarm water using a clean sponge or a soft cloth Rinse well with clean water "DO NOT'S" - Very Important

DON'T clean in hot sun or on very hot days

- DON'T use abrasive or highly alkaline cleaners on the main body ■ DON'T scrape the main body with razor blades, or other sharp instruments
- DON'T ever use, gasoline, acetone or carbon tetrachloride
- DON'T ever use a pressure washer aimed at the speakers

CAUTION!! Using other mounting methods may void this warranty

B

4 **GETTING TO KNOW YOUR BRT34A ONBOARD CONTROL PANEL (OCP)** 

(A) OCP - ONBOARD CONTROL PANEL

PREVIOUS TRACK-Short Press;

Long press and hold for VOLUME - Ramp DOWN 2 NEXT TRACK- Short Press;

GETTING STARTED

- Long press and hold for VOLUME Ramp UP RGB ILLUMINATION ON/OFF - (Auto 10 minute timer when BRT34A
- ACC is turned OFF;)
- BLUETOOTH PAIRING INDICATOR LED BLUE / AUX RED COLOR

**AUX-INPUT** 

BRT34A can play audio from any device that has a 3.5mm headphone audio jack.

- EQ EQ1 | EQ2 | EQ3 | FLAT EQ1 Default Press and hold for 3 seconds
- POWER ON Short Press; RESET- Press and hold for 10 seconds
- 7 PLAY/PAUSE AUX MUTE

YOUR DEVICE

\_

# STREAMING MUSIC M M BOSE W 4 8 0

## MULTIFUNCTION CONTROLLER BLUETOOTH OPERATION

1) Press the PLAY/PAUSE once to start playing music or press the PLAY button from

2) To skip songs or advance, press the NEXT TRACK button 3) To select the previous song, press the \*\*D\*\* PREVIOUS TRACK\*\* button

# **VOLUME CONTROL**

(A) RF CONTROLLER

1) POWER ON / OFF

BRIGHTNESS UP

MODE DOWN

COLOR DOWN

9 COLOR UP

10 SPEED DOWN

BRIGHTNESS DOWN

TOOLS NEEDED:

- Wrench or Pliers

- 3mm Allen Wrench

- Crimp Tool

2) MODE UP

4) SPEED UP

4) To raise the volume long-press the 2 NEXT TRACK button or use your devices controls

NOTE: If BLUETOOTH or AUX is disconnected for more than 10 minutes the UNIT will automatically turn *OFF*, however, when not in use the *ACC* switch should be manually turned *OFF* to keep the vehicles main battery from draining

Make sure your Bluetooth device volume is set at 100% level before stowing your device

GETTING STARTED (RF CONTROLLER)

USING THE REMOTE CONTROL

the film protruding the tray

· Do not store in direct sunlight Do not submerge in mud and/or water

INSTALLING THE BATTERY

When use for the first time, pull out

RF controller range: Up to 25ft (LoS)

 Do not obstruct the RF remote with metal Always keep away from small children

Slide the tray out on back of the remote

control and insert battery with the (+) and

minus (-) poles pointing in the proper direction

**REPLACEMENT BATTERY - CR2032** 

OPTIONAL TOOLS NEEDED:

Hand saw or Jigsaw

**GETTING TO KNOW YOUR** 

BRT34A LED RF CONTROLLER

 $\stackrel{3}{\longrightarrow}$  AUTO DEMO (LONG PRESS FOR SINGLE COLOR MODE)

#### **VOLUME CONTROL** 5) To lower the volume long-press the (1) PREVIOUS TRACK button or use your devices controls

5) To raise the volume long- press the 2 NEXT TRACK button on the OCP 6) To lower the volume long- press the (1) PREVIOUS TRACK button on the OCP 7) To **MUTE** the volume press the **7 PLAY/PAUSE** button

(Cable not included)

**MULTIFUNCTION CONTROLLER AUX-IN OPERATION** 

4) Route the wire back to BRT34A, secure your device in a safe location


2) Disconnect any paired *Bluetooth* device by turning off *Bluetooth* in your devices

3) Connect your 3.5mm AUX-IN cable located on right side of the BRT34A to your devices

1) Power on the *OCP* by short-press the **6 POWER** button .

Make sure your device headphone volume is set at 100% level before stowing your device

# **WIRE DIAGRAM**

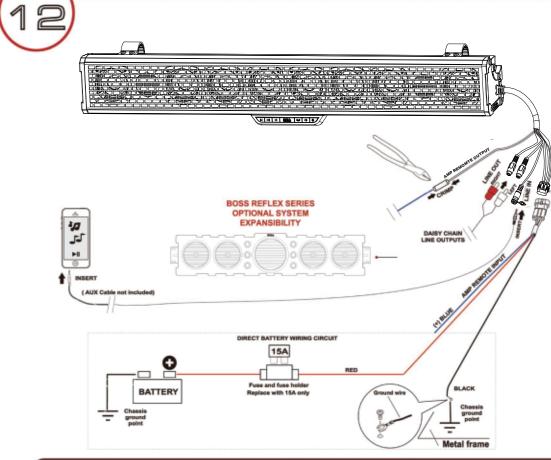

## **SPECIFICATIONS**

Version: 4.1A2DP / AVRCP / GATT • Range: 33ft (10m) Class 2 4EQPresets
RCA Line Output: 2V RMS Tweeter Size: 1"

 Maximum Output Power: 700 Watts Input Impedance: 10kΩ • Frequency Response: 45Hz-25kHz

Operational Power: 14.4VDC (10-16V allowable)

MAX Current Draw: 12.7A
Replacement Fuse: 15A ATO TYPE

Cabinet Material: Aluminum Extrusion

 Color: Black Powder Coating Weight: 19.84lbs / 9.00kg Dimensions Inches WxHxD: 33.77 x 4.98 x 5.55 Dimensions cm WxHxD: 85.8 x 12.6 x 14.1 • Storage Temperature: 5°F to 175°F / -15°C to 80°C • Operation Temperature: 32°F to 140°F / 0°C to 60°C

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE