

USER'S MANUAL

MC400

ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM



BOSS[®]
AUDIO SYSTEMS

MC400 Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems Off-road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, and will afford you years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



MC400 Motorcycle/UTV Amplified Speaker System

Contents

Amplifier	1 PC
High-Performance, Weatherproof Speakers	2 PCS
Amplifier Mounting Screws	4 PCS
Mounting Hardware	2 PCS
Rubber Mounting Shims	4 PCS
Fuse	1 PC
User's manual	1 PC

Features:

RCA & 3.5mm Audio Inputs

Metal Clamps


Weatherproof Volume Control

High-Impact, High Temp Speaker Enclosures

Weatherproof Speakers

MC400 Motorcycle/UTV Amplified Speaker System

Connections

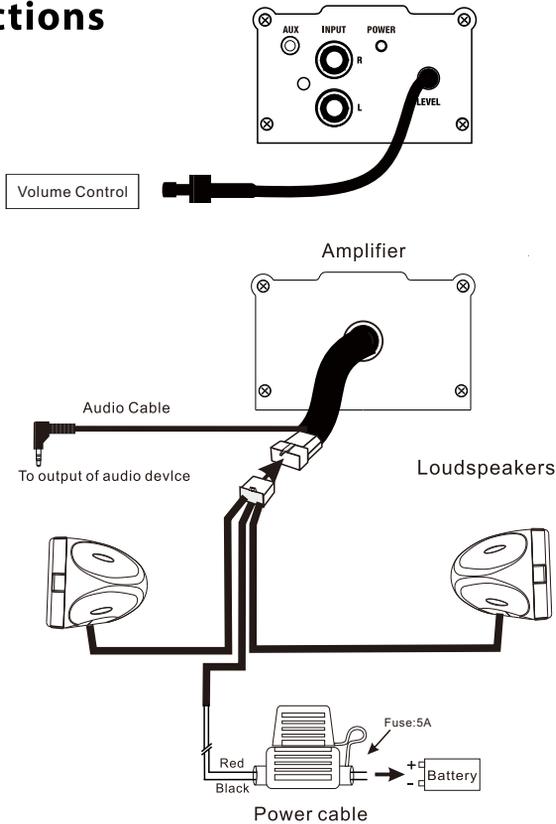


Amplifier and Loudspeaker Mounting

Install Reminder

These should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)



MC400 Motorcycle/UTV Amplified Speaker System

Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 5A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
4. Use your player device and wired remote volume controller to control your level of loudness.

MC400 Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	-----10 ~ 16 V
Max Power	-----600 W
THD	-----<0.1%
S/N	----->85 dB
Channel Separation	----->50 dB
Frequency Response	----- 80 Hz - 15 KHz
Sensitivity	-----150 mv -1v

USER'S MANUAL

MC400

ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM



BOSS Audio Systems

3451 Lunar Court • Oxnard, CA 93030

www.bossaudio.com | 800.999.1236

tech support: www.bossaudio.com/support



0714

iPod® / iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries.
BOSS Audio Systems is not affiliated with Apple, Inc.