### **USER'S MANUAL**

#### **MC440B**

**BLUETOOTH®** | 3" (76 mm) WEATHER RATED SPEAKERS AND AMPLIFIER SYSTEM



BOSS Audio Systems 3451 Lunar Court • Oxnard, CA 93030

www.bossaudio.com 800-999-1236 US Toll-free 805-751-4853 Customer Service

Tech Support: www.bossaudio.com/support/technical-support



0817

Pod® and Phone® are trademarks of Apple, Inc., registered in the U.S., and other countries, BOSS Audio Systems is not affiliated with Apple, Inc.
The Bluedouth® word mark and logos are registered trademarks owned by Bluedouth StG, Inc., and any use of such marks by BOSS Audio Systems is under licens?
Other trademarks and trade names are those of their respective owners.

# **USER'S MANUAL**

# **MC440B**

**BLUETOOTH®** | 3" (76 mm) WEATHER RATED SPEAKERS AND AMPLIFIER SYSTEM















### MC440B Motorcycle/UTV Amplified Speaker System

NOTES			

### MC440B Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems Off-Road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, for years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



# MC440B Motorcycle/UTV Amplified Speaker System

### **Contents**

Amplifier	1 PC		
High-Performance, Weatherproof Speakers			
Amplifier Mounting Screws			
Mounting Hardware	2 PCS		
Rubber Mounting Shims			
Amplifier Mounting Hardware	8 PCS		
Fuse	1 PC		
User's manual	1 PC		

### **Features:**

3.5mm Audio Inputs
Speaker Clamp Mounts
Weatherproof Volume Control
High-Impact, High Temp Speaker Enclosures
Weatherproof Speakers
Bluetooth Audio Streaming

### MC440B Motorcycle/UTV Amplified Speaker System

# **Specifications**

Operation Voltage10~1	6 V
Max Power 600	) W
THD <0.	1%
S/N>>85	dB
Channel Separation>50	dB
Frequency Response 65Hz - 22K	Ήz
Sensitivity>>500	mv
Speaker Wires	4.9'
Volume Control Wire {	5.9'
Audio Input Cable	5.9'
Power Cable {	3.2'
Bracket Size Range0.75" ~1.:	25"
Fuse Rating	5A

### MC440B Motorcycle/UTV Amplified Speaker System

#### Installation

- 1. Screw the brackets to the bottom of the speakers.
- 2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
- 3. Fasten the mounting screws after you review the safety of the mounting location.

## Wiring


- 1. Be sure to run the wiring securely and far away from any moving components.
- 2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 5A) switched power source.
- 3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
- 4. Use your player device and wired remote volume controller to control your level of loudness.

### **Bluetooth**

To pair and connect your Bluetooth device to the MC440B Enter Settings > Bluetooth Menu > Search > "Boss MC440B" >If Prompted to enter a passcode enter: "0000"

### MC440B Motorcycle/UTV Amplified Speaker System

### **Connections**

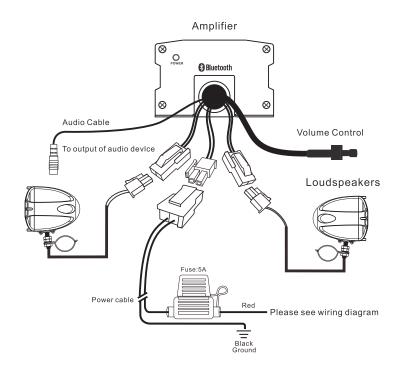

### **Amplifier and Loudspeaker Mounting**

#### **Install Reminder**

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust


Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)



6



12 VDC SPDT Relay
(Single Pole Double Throw)
NOT INCLUDED, SOLD SEPERATLY

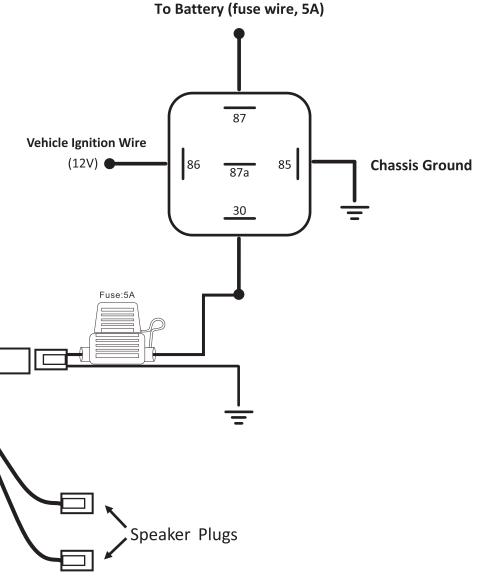

5

4