

USER'S MANUAL

MC750B

BLUETOOTH® | 4" (102 mm) WEATHER RATED SPEAKERS AND AMPLIFIER SYSTEM

BOSS[®]
AUDIO SYSTEMS

BOSS Audio Systems
3451 Lunar Court • Oxnard, CA 93030

www.bossaudio.com
800-999-1236 US Toll-free
805-751-4853 Customer Service

Tech Support: www.bossaudio.com/support/technical-support



0817

iPod® and iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries. BOSS Audio Systems is not affiliated with Apple, Inc.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BOSS Audio Systems is under license.
Other trademarks and trade names are those of their respective owners.

USER'S MANUAL

MC750B

BLUETOOTH® | 4" (102 mm) WEATHER
RATED SPEAKERS AND AMPLIFIER SYSTEM



BOSS[®]
AUDIO SYSTEMS

REBEL
POWER SPORTS

MC750B Motorcycle/UTV Amplified Speaker System

NOTES

MC750B Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems Off-Road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, for years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



MC750B Motorcycle/UTV Amplified Speaker System

Contents

Amplifier	1 PC
High-Performance, Weatherproof Speakers	2 PCS
Amplifier Mounting Screws	4 PCS
Mounting Hardware	2 PCS
Rubber Mounting Shims	4 PCS
Amplifier Mounting Hardware	8 PCS
Fuse	1 PC
User's manual	1 PC

Features:

- 3.5mm Audio Inputs
- Speaker Clamp Mounts
- Weatherproof Volume Control
- High-Impact, High Temp Speaker Enclosures
- Weatherproof Speakers
- Bluetooth Audio Streaming

MC750B Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	10~16 V
Max Power.....	1000W
THD.....	<0.1%
S/N.....	>85 dB
Channel Separation.....	>50 dB
Frequency Response.....	65Hz - 22KHz
Sensitivity.....	>500mv
Speaker Wires	4.9'
Volume Control Wire	5.9'
Audio Input Cable	5.9'
Power Cable	8.2'
Bracket Size Range	0.75" ~1.25"
Fuse Rating	7.5A

MC750B Motorcycle/UTV Amplified Speaker System

Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring


1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 7.5 A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
4. Use your player device and wired remote volume controller to control your level of loudness.

Bluetooth

To pair and connect your Bluetooth device to the MC750B
Enter Settings > Bluetooth Menu > Search > “Boss MC750B”
>If Prompted to enter a passcode enter : “0000”

MC750B Motorcycle/UTV Amplified Speaker System

Connections

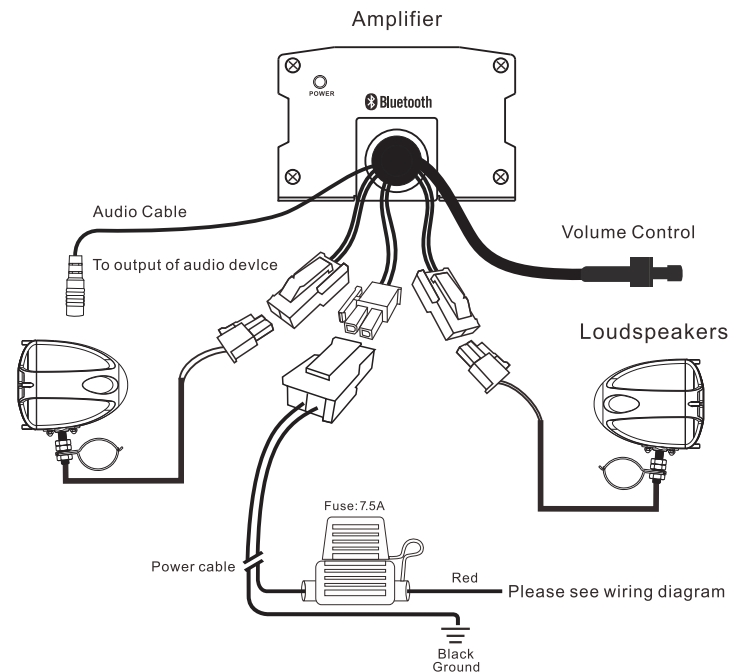


Amplifier and Loudspeaker Mounting

Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)





12 VDC SPDT Relay

(Single Pole Double Throw)

NOT INCLUDED, SOLD SEPERATLY

