





S1W15-D2

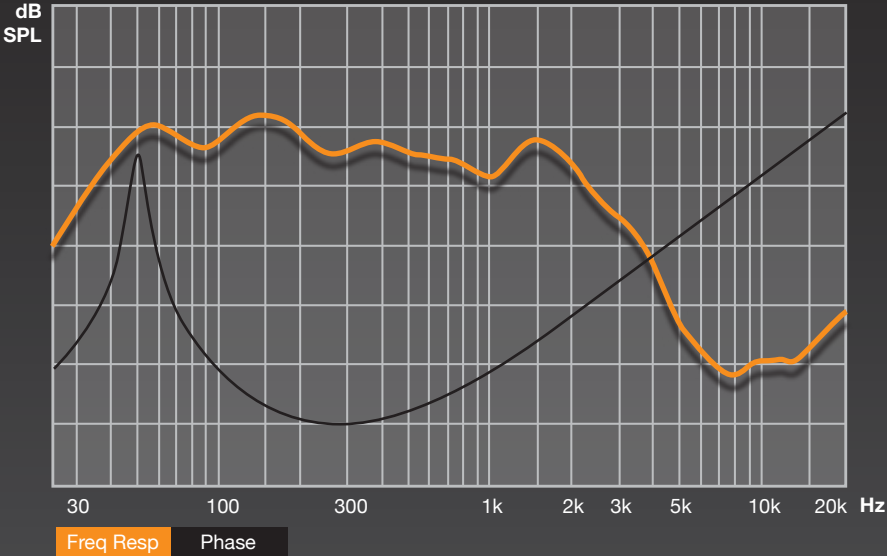

15 in

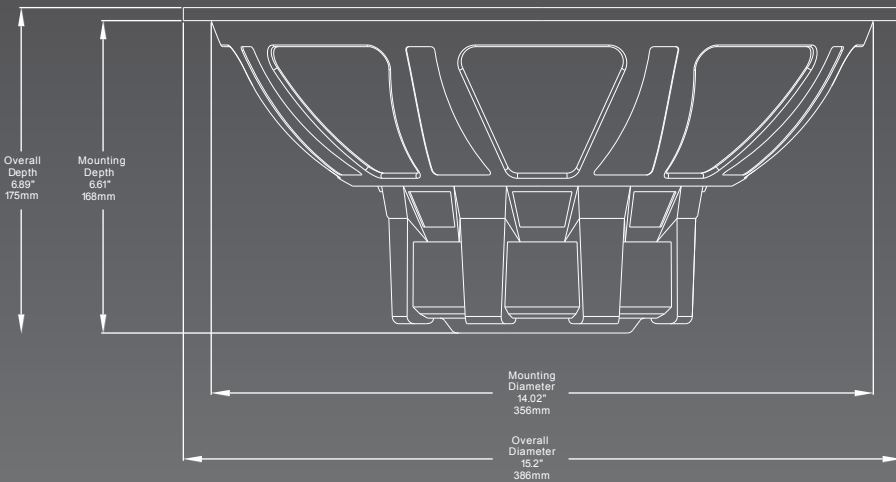

TS PARAMETERS

FO: 41.967 Hz
 QMS: 9.013
 QES: 0.404
 QTS: 0.386
 LEVC: 234.805 uH
 CMS: 67.909 uM/N
 MMS: 211.780 gr

MMD: 198.041 gr
 NO: 1.175%
 BL: 10.519 T/M
 SPL: 95 dB
 VAS: 66.364 L
 RE: 1.8 Ohm
 SD: 829.580 cm
 XMAX: 18 mm

2 Ohm 1200 Watts

SPECIFICATIONS



Application: Subwoofer

Basket Type: Steel Basket
 Cone: Paper Cone
 Dust Cap: Vacuum Molded Polypropylene
 Surround Style: Foam Surround
 Structure Weight: 3.44lbs
 2.5" Dual 2 ohm ASV Voice Coil

Impedance: 2 ohm
 RMS / Peak Watts: 600 / 1200
 Frequency Response: 25Hz - 750Hz
 SPL @ 1w/1m: 95dB

ENCLOSURE STYLE:

FLATEST RESPONSE <small>(2cu ft)</small> Voice Coils in Parallel	SIZE H x W x L
Enclosure Dim.	19" x 19" x 12.75" (482.6 x 482.6 x 323.85)
Slot Port	17.5" x 1.75" x 9.25" (444.5 x 44.45 x 234.95)
Circular Port	4" x 4" x 10.5" (101.6 x 101.6 x 266.7)
System Gain	+1.5 dB/67 Hz
F-3	45 Hz
Tuning Frequency	50 Hz
Recommended LP Crossover Freq.	80 - 120 Hz



Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
 800.477.2328 • 732.370.5400 • fax: 732.370.5553
 cadence@cadencesound.com • www.cadencesound.com

