




CADENCE

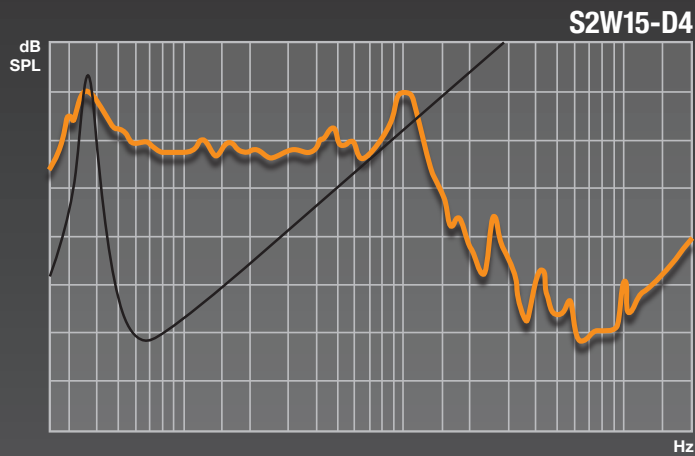

2 / 4 Ohm
1600 Watts
15 in

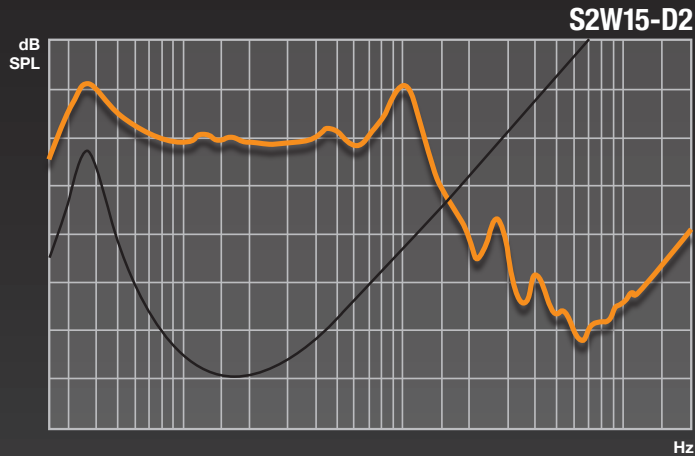

Freq Resp Phase

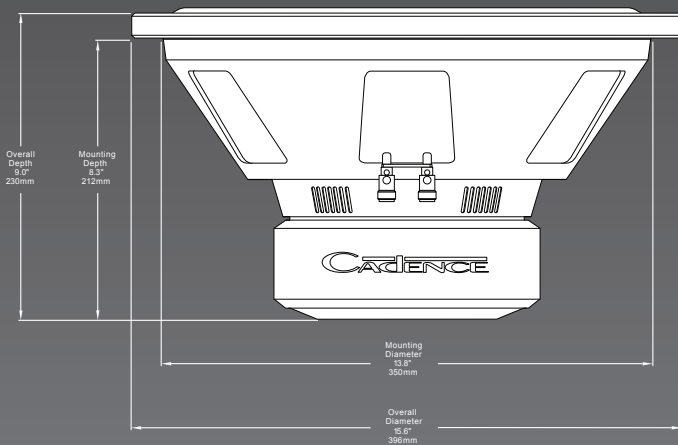

TS PARAMETERS

S2W15-D2

FO: 30.255 Hz
QMS: 3.252
QES: 0.418
QTS: 0.371
LE: 475.403 uH
CMS: 91.369 uM/N
MMS: 302.858 gr
MMD: 288.992 gr
NO: .579%
BL: 10.491 T/M
SPL: 94 dB
VAS: 90.394 L
RE: 1.9 Ohm
SD: 834.690 cm
XMAX: 24.5

S2W15-D4

FO: 30.377 Hz
QMS: 7.813
QES: 0.561
QTS: 0.524
CMS: 84.438 uM/N
MMS: 325.103 gr
MMD: 311.237 gr
NO: .403%
BL: 18.808 T/M
SPL: 94 dB
VAS: 83.535 L
RE: 3.6 Ohm
SD: 834.680 cm
XMAX: 24.5

SPECIFICATIONS

Application: Subwoofer

Basket Type: Rolled Steel
Cone: Kevlar Reinforced Ultra-Stiff Paper Composite
Dust Cap: Woven Fiberglass
Surround Style: High Excursion Double Laminated Foam
Structure Weight: 6.13 lbs
2" Dual 2 or 4 ohm ASV Voice Coil


Impedance: 2 or 4 ohm
RMS / Peak Watts: 800 / 1600
Frequency Response: 25 Hz - 500 Hz
SPL @ 1w/1m: 94 dB

2 OHM ENCLOSURE STYLE:

VENTED (2.75cu ft)	SIZE H x W x L
Enclosure Dim.	19" x 19" x 17" (482 x 482 x 431.8)
Slot Port	17.5" x 1.5" x 13.75" (444.5 x 38.1 x 349.25)
Circular Port	6" x 17.75" (152.4 x 450.85)
System Gain	+3.5 dB/48 Hz
F-3	30 Hz
Tuning Frequency	35 Hz
SEALED (2.75cu ft)	Enclosure Dim.
F-3	40 Hz

4 OHM ENCLOSURE STYLE:

VENTED (2.75cu ft)	SIZE H x W x L
Enclosure Dim.	19" x 19" x 17" (482 x 482 x 431.8)
Slot Port	17.5" x 2" x 14" (444.5 x 50.8 x 355.6)
Circular Port	6" x 12" (152.4 x 304.8)
System Gain	+3.5 dB/48 Hz
F-3	35 Hz
Tuning Frequency	40 Hz
SEALED (1.25 cu ft)	Enclosure Dim.
F-3	56 Hz

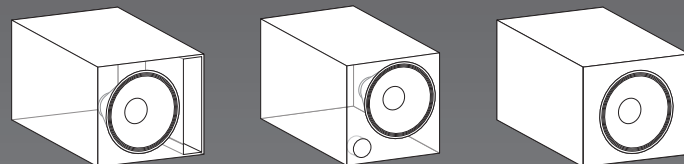

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
800.477.2328 • 732.370.5400 • fax: 732.370.5553
cadence@cadencesound.com • www.cadencesound.com

