




CADENCE

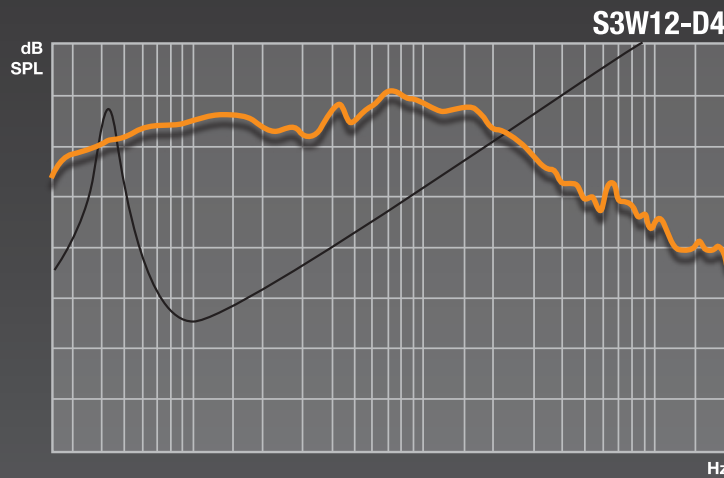

2 / 4 Ohm
2400 Watts **12 in**

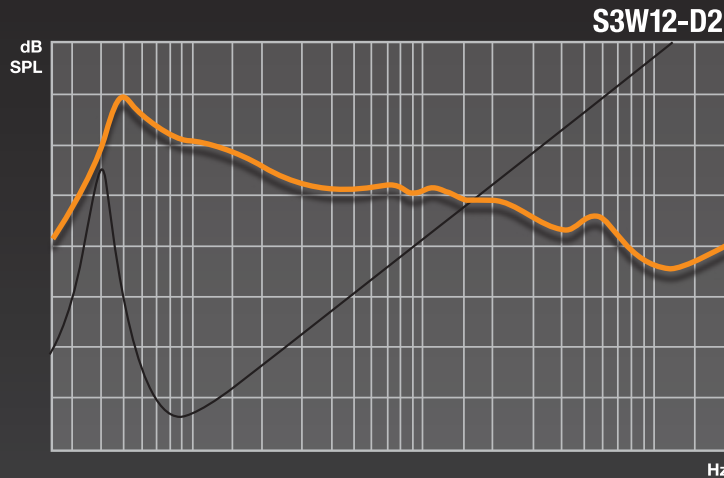

Freq Resp Phase

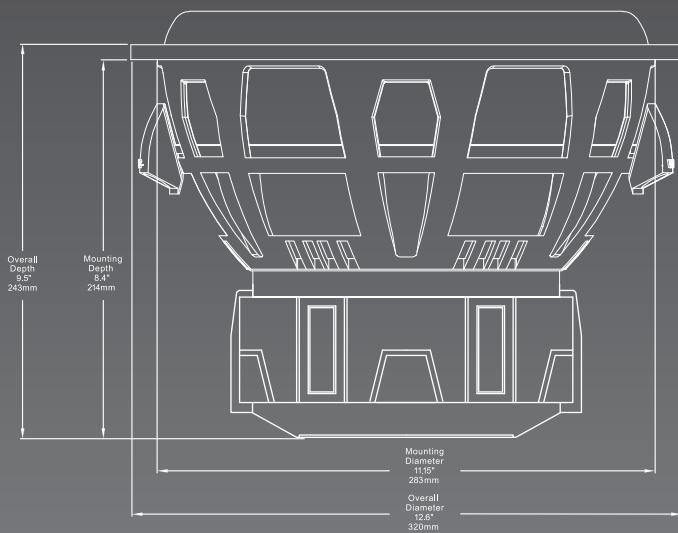

TS PARAMETERS

S3W12-D2

REVC: 1 Ohm
FO: 37.333 Hz
SD: 514.720 Sq Cm
MD: 125.000 g
BL: 12.851 T/M
QMS: 4.546
QES: 0.297

QTS: 0.359
No: 0.398%
SPL: 92 dB
VAS: 32.981 ft
CMS: 87.666u M/N
MMS: 260.058 g
MMD: 253.343 g

S3W12-D4

REVC: 6.4 Ohm
FO: 35.368 Hz
SD: 51.400K mm
MD: 130.500 g
BL: 28.083 T/M
QMS: 6.114
QES: 0.417

QTS: 0.390
No: 0.338%
SPL: 93 dB
VAS: 1.161 ft
CMS: 87.632u M/N
MMS: 231.079 g
MMD: 224.379 g

SPECIFICATIONS


Application: Subwoofer

Basket Type: Cast Aluminium
Cone: Ultra Stiff Woven Carbon Fiber Glass
Dust Cap: Woven Carbon Fiber Glass
Surround Style: High Density Double Laminated Foam
Structure Weight: 6.13 lbs
3" Dual 2 or 4 ohm Flat Wire Voice Coil

Impedance: 2 or 4 ohm
RMS / Peak Watts: 1200 / 2400
Frequency Response: 20 Hz - 500 Hz
SPL @ 1w/1m: 92 dB (2 ohm) / 93dB (4 ohm)

ENCLOSURE STYLE:

VENTED (1.5cu ft)	SIZE H x W x L
Enclosure Dim.	16" x 16" x 14" (406.4 x 406.4 x 355.6)
Slot Port	14.5" x 1.5" x 10" (368.3 x 38.1 x 254)
Circular Port	4" x 8" (101.6 x 203.2)
System Gain	+3.65 dB/55 Hz
F-3	37 Hz
Tuning Frequency	45 Hz
SEALED (1.5cu ft)	SIZE H x W x L
Enclosure Dim.	16" x 16" x 14" (406.4 x 406.4 x 355.6)
F-3	55 Hz

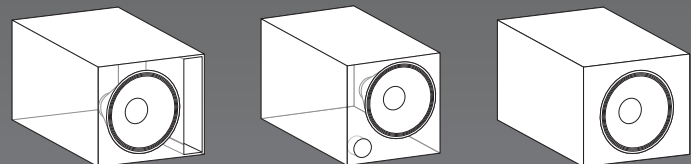

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
800.477.2328 • 732.370.5400 • fax: 732.370.5553
cadence@cadencesound.com • www.cadencesound.com

