

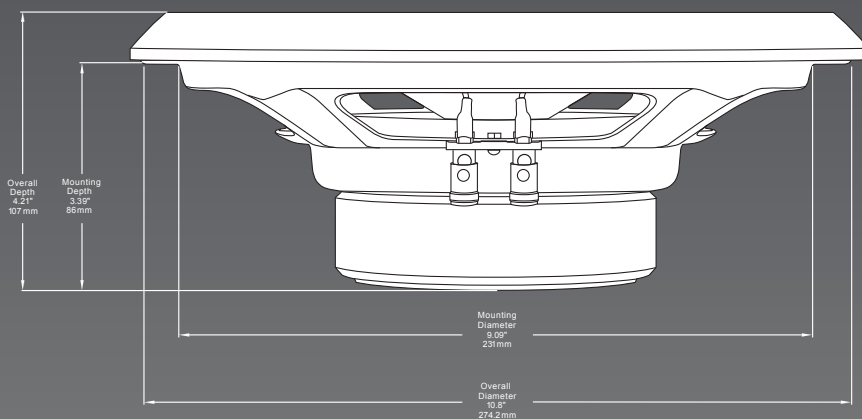


CADENCE

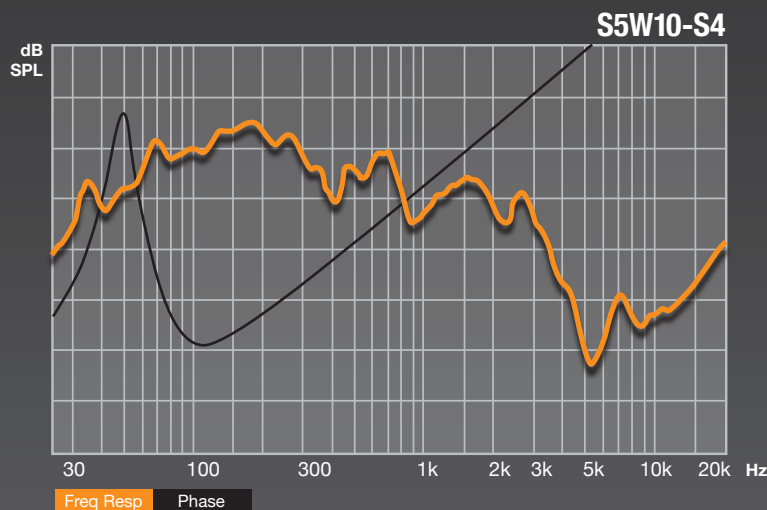

2 / 4 Ohm **10 in**
500 Watts

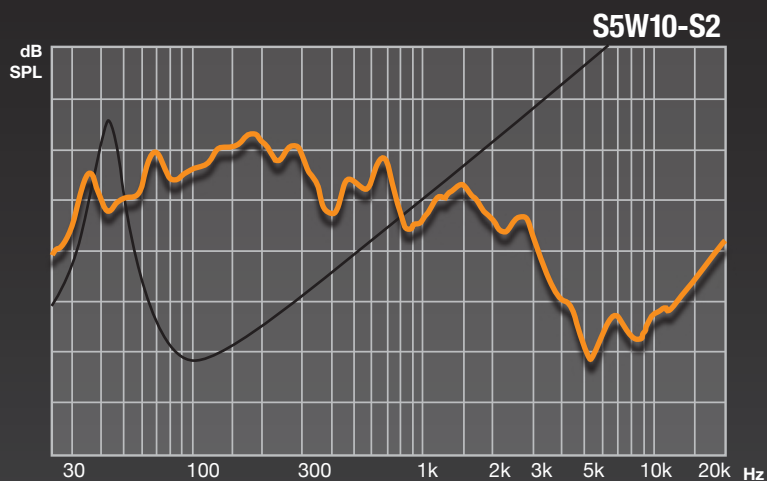

TS PARAMETERS

S5W10-S2

FO: 35.734 Hz
QMS: 4.207
QES: 0.482
QTS: 0.433
CMS: 175.985 $\mu\text{M/N}$
MMS: 112.718 gr

BL: 9.718 T/M
SPL: 88 dB
VAS: 22.854 L
RE: 1.8 Ohm
SD: 339.8 cm
XMAX: 4.95

S5W10-S4

FO: 41.145 Hz
QMS: 4.210
QES: 0.521
QTS: 0.464
CMS: 148.629 $\mu\text{M/N}$
MMS: 100.673 gr

BL: 12.644 T/M
SPL: 88 dB
VAS: 24.369 L
RE: 3.2 Ohm
SD: 339.8 cm
XMAX: 5.35

SPECIFICATIONS


Application: Subwoofer

Basket Type: Rolled Steel
Cone: Ultra-Stiff Paper Composite
Dust Cap: 3D Molded High Gloss Acrylic
Surround Style: Laminated Butyl Rubber
Structure Weight: 2.813 lbs
2" Single 2 or 4 ohm ASV Voice Coil

Impedance: 2 or 4 ohm
RMS / Peak Watts: 250 / 500
Frequency Response: 36 Hz - 500 Hz
SPL @ 1w/1m: 88dB

ENCLOSURE STYLE:

VENTED (.75cu ft)	
Enclosure Dim.	15.5" x 20" x 6.5" (355.6 x 355.6 x 393.7)
Slot Port	12" x 3" x 4" (317.5 x 31.75 x 292.1)
Circular Port	4" x 9.5" (101.6 x 266.7)
System Gain	+5 dB/73 Hz
F-3	49 Hz
Tuning Frequency	60 Hz
SEALED (.65-1.25 cu ft)	
Enclosure Dim.	15.5" x 20" x 6.5" (355.6 x 355.6 x 393.7)

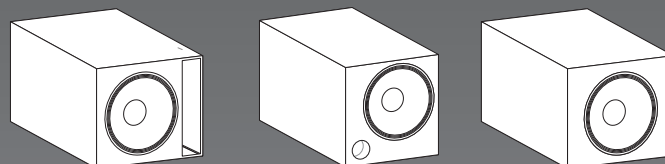

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
800.477.2328 • 732.370.5400 • fax: 732.370.5553
cadence@cadencesound.com • www.cadencesound.com

