


CADENCE

Xenith XM 64Vi



6 in

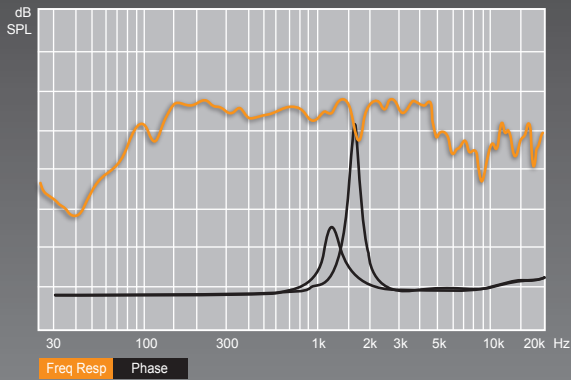

TS PARAMETERS

FMS: 138 Hz BL: 5.86
QMS: 11.74 SPL: 100 dB
QES: 0.965 VAS: 3.1 l
QTS: 0.892 RE: 3.4 Ohm
RES: 6.1 Ohm RP: 9.5 Ohm
RMS: 0.9 kg/s LP: 2.9 mH
CMS: 0.14 mm/N CP: 562.1 μ F
MMS: 6.7 gr LE: 0.3 mH
NREF: 1.29 %


4 Ohm 150 Watts

SPECIFICATIONS

Application: Mid - High

Basket Type: Open Basket
Dust Cap: Bullet
Surround Style: Accordion
Structure Weight: 60 oz.

Impedance: 4 Ohm
RMS / Peak Watts: 75 / 150
Frequency Response: 125Hz - 10KHz
SPL @ 1w/1m: 100dB

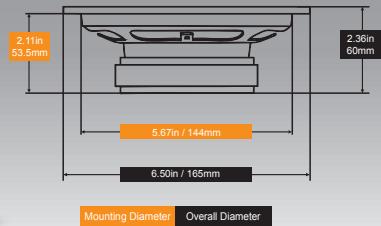

Cadence Acoustics Ltd.

859 Lawson St, City of Industry, CA 91748
800,477,2328 • 626,465,3385 • Fax: 626-470-6111 • www.cadencesound.com

