


CADENCE

Xenith XM 84Vi



8 in

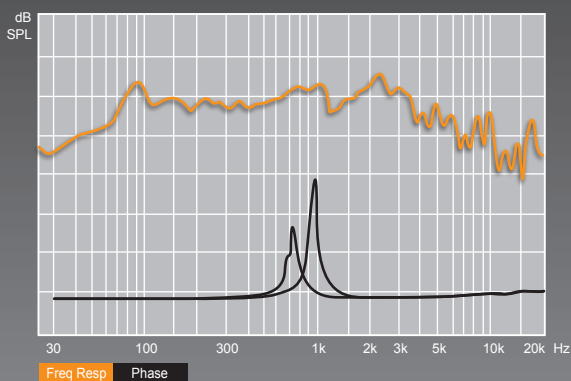

TS PARAMETERS

FMS: 95.5 Hz BL: 5.3
QMS: 12.00 SPL: 102 dB
QES: 0.96 VAS: 13.5 l
QTS: 0.89 RE: 3.4 Ohm
RES: 8.3 Ohm RP: 25.4 Ohm
RMS: 0.7 kg/s LP: 6.0 mH
CMS: 0.21 mm/N CP: 818.7 μ F
MMS: 13.2 gr LE: 0.3 mH
NREF: 1.18 %

4 Ohm 250 Watts

SPECIFICATIONS

Application: Mid - High

Basket Type: Open Basket

Dust Cap: Bullet

Surround Style: Accordion


Structure Weight: 90 oz.

Impedance: 4 Ohm

RMS / Peak Watts: 125 / 250

Frequency Response: 100Hz - 11KHz

SPL @ 1w/1m: 102dB

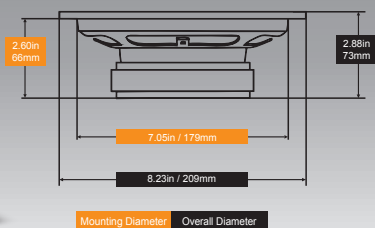

Cadence Acoustics Ltd.

859 Lawson St, City of Industry, CA 91748
800,477,2328 • 626,465,3383 • Fax: 626-470-6111 • www.cadencesound.com

