



Utopia Be® tweeter




- Pure Beryllium inverted dome
- High power Neodymium ring magnet
- Thick cast zinc alloy mounting

SPECIFICATIONS

Nominal power	20W
Maximum power	200 W
Sensitivity	94.1 dB
Cone	Beryllium
Surround	Poron®
Nom. impedance	8Ohm
DC resistance	6Ohm
VC diameter	20 mm
VC height	1.4mm
Former	Aluminum
Layers	2
Wire	Aluminum
Inductance	-
Xmax	-
Magnet dxh	Neodymium
Magnet weight	-
Flux density	2.1 T
Gap height	2.5 mm
Net weight	-

FREQUENCY RESPONSE / IMPEDANCE

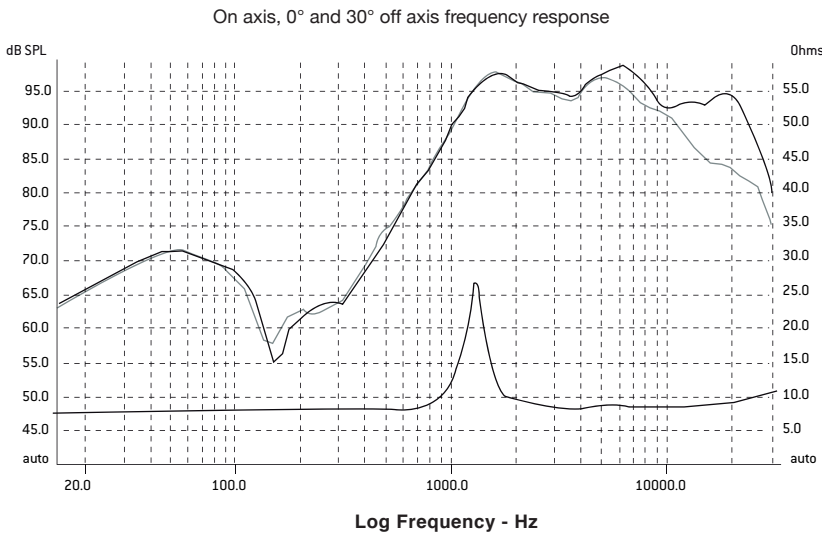

PARAMETERS

Fs	1294 Hz
Vas	-
Qts	-
Qes	-
Qms	-
Re	6Ohm
Sd	7.07cm ²
Cas	-
Mas	-
Ras	-
Cms	-
Mms	-
Rms	-
Ces	-
Les	-
Res	-
BI	-
SPL	93 dB/W/m

MECHANICAL DRAWING

