



Flush mounting for 50 mm (1.96") cutout

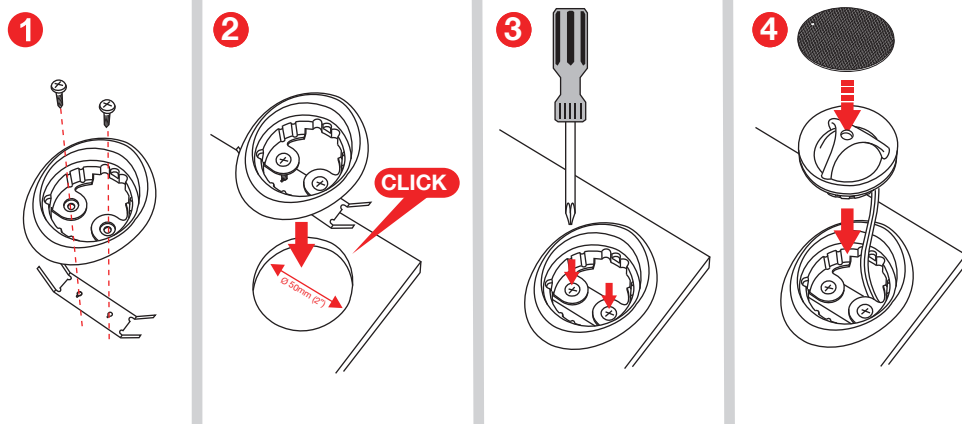

Surface mounting option 2

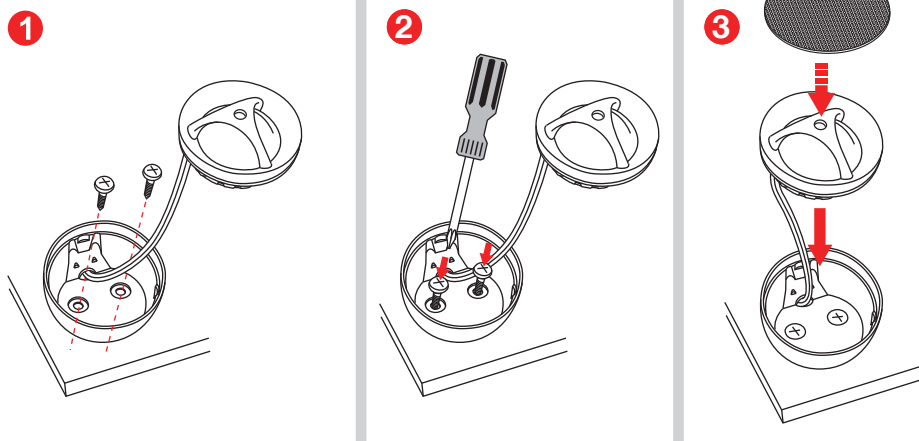

Specifications

2-Way System

Nominal Impedance	4 ohm	
Power Handling	60W	
Max. Transient Power Handling	120W	
Sensitivity (2.83V/1M)	94dB	
Frequency Response	60-22,000 Hz	
Voice Coil Diameter	Woofer: 28mm (1.125")	Tweeter: 25mm (1")
Voice Coil Wire	Woofer: Copper	Tweeter: Copper
Magnet System	Woofer: Hybrid magnet system	Tweeter: Neodymium
Mounting Depth	Woofer: 63mm (2.5")	Tweeter: 20mm (0.8")


maximus 602 2WAY

High Efficiency Component System Installation Instructions




www.morelhifi.com


Content - Tweeter

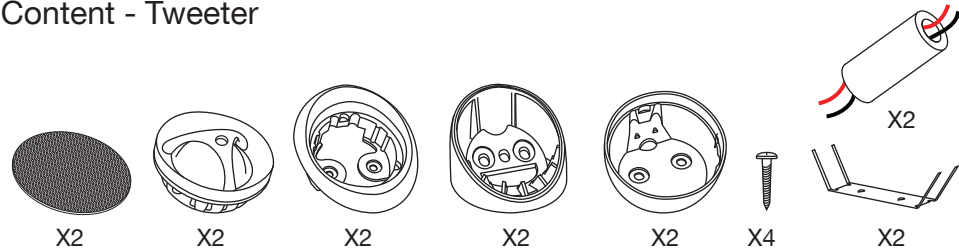


Content - Woofer

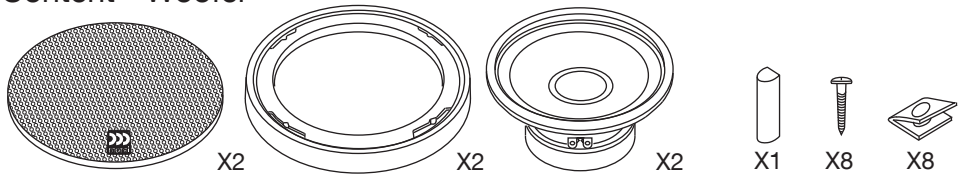

Woofer mounting

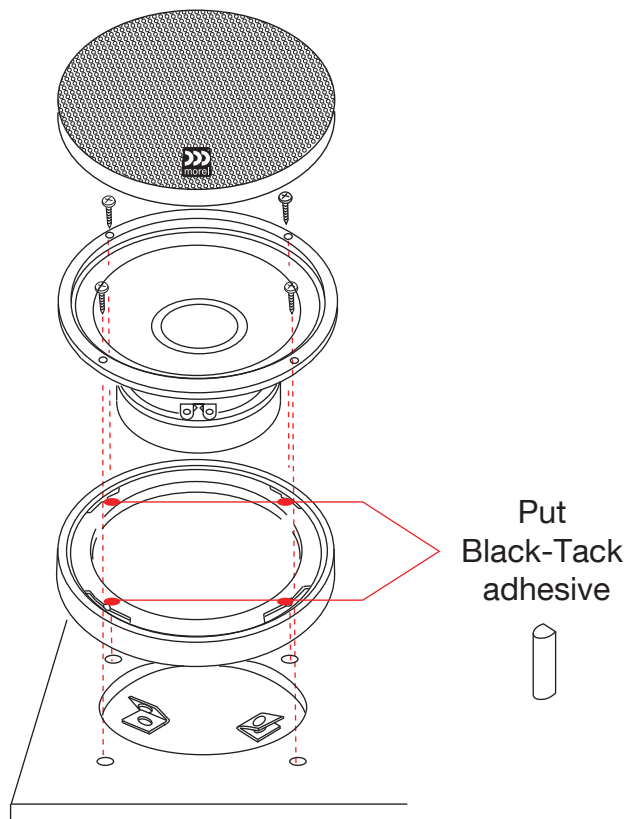

Crossover Connection

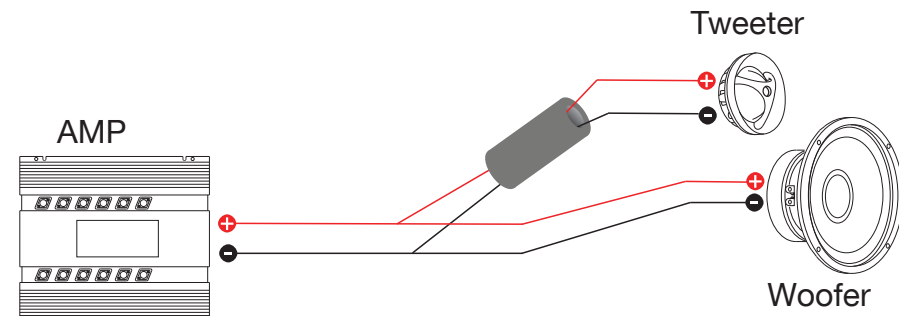

Surface mounting

