





User Manual

RLT250

INTRODUCTIONS

Congratulations on your purchase of our product! We hope RECOIL Acoustics will delight you with its impressive performance. In producing our speakers, we utilize high-quality components and cutting-edge materials. This manual contains essential instructions for proper system installation and use. Before installation, please carefully review all guidelines provided. Failure to follow these instructions may result in product damage or unintended malfunctions.

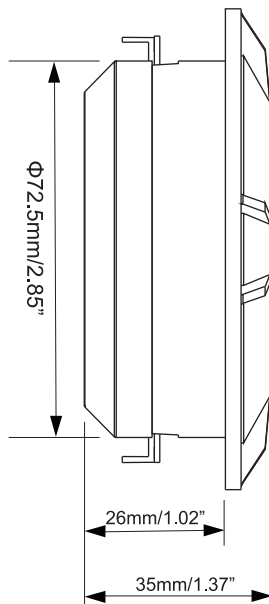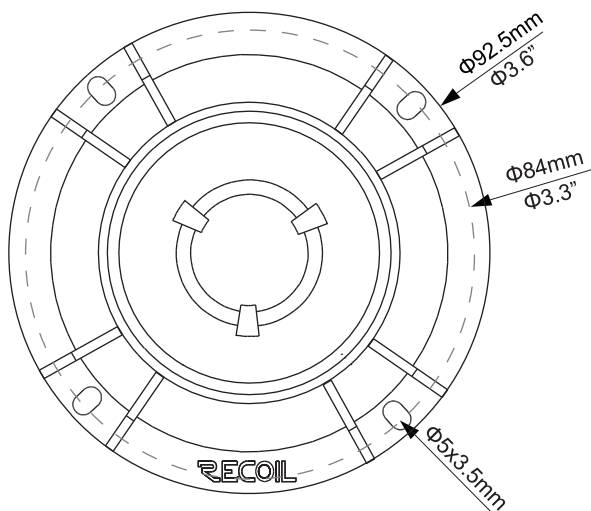

SPECIFICATIONS

Configuration: Tweeter

Size: 25.4mm (1")

Minimum Input (RMS) : 60 W

Rated Power (MAX) : 120 W

Nominal Resistance (Ohm) : 4 Ω

Minimum Resistance (Ohm) : 3.2 Ω

Sensitivity (1W/M) : 93 dB(+/-3dB)

Frequency Range: 3.5-20 kHz

Cone Material: Aluminum Magnesium Alloy

Coil Material: KSV

Magnet Material : NdFeB